

11 SEPTEMBER 2017

STRONG IP ANOMALY GENERATED FROM ORIENTATION SURVEY DESIGNED TO TARGET HIGHER GRADE GOLD AT HOLLETON

HIGHLIGHTS

- Strong IP anomaly up to 33 mV/V defined by single line orientation survey at the Brahma Prospect.
- Survey designed to identify zones with higher sulphide concentrations associated with high grade gold.
- Previous drilling shows a correlation between sulphide content and gold grade.
- Lower grade gold in previous drillhole GRDD0002 (32m @ 0.3 g/t Au¹) is coincident with a weaker IP response.
- Results suggest the much stronger response to the north may be indicating higher sulphide content and potentially higher gold grades.

Montezuma Mining Company Ltd ("Montezuma" or "Company") is pleased to advise that a successful dipole-dipole array induced polarisation ("IP") orientation survey has been completed at the Company's 100% owned Holleton Gold Project.

The purpose of the IP survey was to test whether the technique can be used to target areas with higher sulphide concentrations along the 2km long basement gold anomaly at the Brahma Prospect.

Limited historical drilling, where only three holes have been drilled deeper than 40m, returned a best intersection of 73m @ 0.3 g/t Au (including 4m @ 1.6 g/t Au and 1m @ 7.6 g/t Au)¹, with all three diamond holes returning broad mineralised intervals. The higher grade gold zones are typically associated with a higher sulphide content.

The results of the survey indicate that a larger scale IP survey along the entire 2km strike length of the Brahma gold target may be the most cost effective method to generate drill targets and expedite the identification of potentially higher grade zones at Brahma.

ABOUT MONTEZUMA MINING

Listed in 2006, Montezuma Mining Company
Ltd (ASX: MZM) is a diversified explorer
primarily focused on gold and manganese. The
Company's primary objective is to achieve
returns for shareholders through selected
strategic acquisitions and targeted exploration.

Montezuma has 100% interests in the Yamarna Gold Projectin the Yamarna Greenstone Belt, the Holleton Gold Project in the Wheat Belt region and the Butcherbird Manganese/Copper Project in the Murchison region, all located in Western Australia.

MARKET DATA

ASX code: MZM
Share price: \$0.15
Shares on issue: 83.5M
Market capitalisation: \$12.5M
Cash (at 30 June): ~\$4.2M
Listed Investments (at 30 June): ~\$7.1M

BOARD AND MANAGEMENT

Chairman Seamus Cornelius Executive Director Justin Brown Non-Executive Director John Ribbons Exploration Manager Dave O'Neill



Company information, ASX announcements, investor presentations, corporate videos and other investor material on the Company's projects can be viewed at www.montezuma.com.au

¹ See company announcement dated 20 July 2016

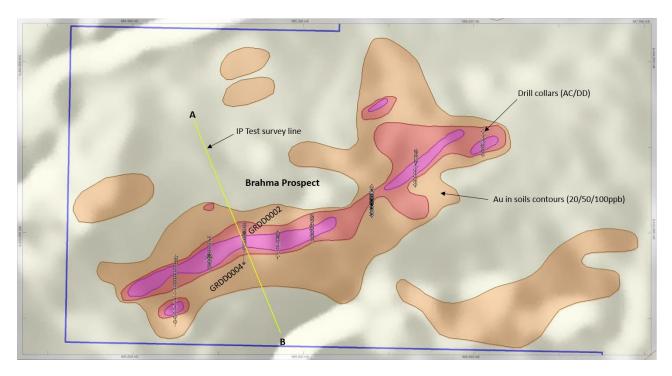


Figure 1: Plan view of the Brahma gold trends howing basement gold values and the location of the IPs urvey line overlaying magnetics (RTP 1VD).

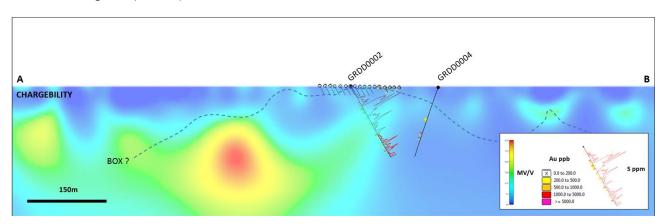


Figure 2: Sectional view of the inversion model along section A-B showing chargebility (mV/V) and historical drilling..

FOR MORE INFORMATION...

Justin Brown

Executive Director

Phone: +61 8 6315 1400

Email: jbrown@montezuma.com.au Company information, ASX announcements, investor presentations, corporate videos and other investor material on the Company's projects can be viewed at: http://www.montezuma.com.au.

The information in this report that relates to Exploration Results, Exploration Targets, Mineral Resources and Mineral Reserves is based on information compiled by Mr David O'Neill who is a member of the Australasian Institute of Mining and Metallurgy. At the time that the Exploration Results, Exploration Targets, Mineral Resources and Mineral Reserves were compiled, Mr O'Neill was an employee of Montezuma Mining Company Ltd. Mr O'Neill is a geologist and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 editi on of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr O'Neill consents to the inclusion of this information in the formand context in which it appears in this report

Please note with regard to exploration targets, the potential quantity and grade is conceptual in nature, that there has been insufficient exploration to define a Mineral Resource and that it is uncertain if further exploration will result in the determination of a Mineral Resource.

JORC Table 1

JORC Code, 2012 Edition – Table 1 report – Holleton Project

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. 	 The data presented herein is historic in nature and as such sampling technique and its nature and quality cannot be ascertained with certainty. It can be assumed that industry standard methods have been utilised by the previous holder. The Induced Polarization (IP) geophysical data collected during Augsut 2017 was captured by Vortex Geophysics using GDD sensors and a Vortex VIP-30 transmitter (100A). The IP survey used receivers spaced 50m along the test line and the dipole-dipole technique.
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	 Drilling presented is a combination of historical Air-core and Diamond Drilling.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential 	 Due to the historic nature of the data, recovery cannot be determined with confidence. The relationship between sample recovery and grade has not been determined.

Criteria	JORC Code explanation	Commentary
	loss/gain of fine/coarse material.	
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Not all geological data for the historical drillholes is available. Where data is available, it has been compiled and entered into the company historic database. The data will be unsuitable for use in a Mineral Resource or more advanced study and is to be used as an exploration aid only.
Sub- sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	 All samples reported are taken from a 1-4 metre drilling interval. The sample preparation and sample size information is not available due to the historic nature of the data. The methods of core preparation and sampling are not available due to the historic nature of the data.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	QAQC protocols are not provided in the historic data.
Verification	The verification of significant intersections by either independent	The historic data cannot be verified and it has been collected from

Criteria	JORC Code explanation	Commentary
of sampling and assaying	 or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	publicly available sources.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 The survey method for collar co-ordinates is not recorded in the historic data. Visual checks have been applied where possible using aerial photography and/or Google Earth imagery to locate holes correctly if errors are discovered. Selected drill collars have been field checked using handheld GPS with excellent correlation. The IP geophysical location data was captured using 12 channel GPS receivers.
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 Data has been collected at various spacings (<10m in places). Compositing has been applied to selected samples. The 2017 IP receiver stations were spaced at 50m intervals in a dipole-dipole configuration.
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	 The historic data is to be used as a guide to future exploration and at face value has been collected in a manner that is sensible with respect to general geological trends and deposit types. More detailed interpretation will be required to assess this further. The IP orientation survey was designed with a 50m sensor spacing across the strike of the stratigraphy (ie E-W). This resolution is considered adequate and was planned with forward modelling of a number of potential target sizes and geometries.
Sample security	The measures taken to ensure sample security.	 Due to the historic nature of the data presented, this cannot be determined.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 No external audits or reviews have been conducted apart from internal company review during the compilation of the historical data.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 The Holleton Project consists of a single granted exploration license (E77/2334), and three pending exploration licenses (E77/2458, E70/4994 and E70/5033) The granted tenure is 100% owned by Montezuma Mining Corporation Ltd.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 The historical exploration data has been collected by various parties and has been reported to high standards. The methods of exploration and techniques used are considered appropriate for the deposit types sought (Au)
Geology	Deposit type, geological setting and style of mineralisation.	The majority of the historical exploration has been focused on the discovery of Archean lode style and orogenic gold deposits.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. 	Refer to historical ASX releases.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the 	Results have been presented as collected from historic data sources.

Criteria	JORC Code explanation	Commentary
	 procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	
Relationshi p between mineralisati on widths and intercept lengths	 If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	 Only downhole lengths are reported. Further work is required to determine exact orientations due to the historic nature of the data.
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	Refer to document.
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	 The historic data presented is to illustrate trends only and all available data is provided.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Refer to document.
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Future work will include further compilation and detailed interrogation of the historic data. Based on the outcomes of the ongoing exploration, follow-up and or extension work will be carried out on the project.