

### 30 MARCH 2016

#### YAMARNA DRILLING EXTENDS BASEMENT MINERALISATION AT JATZ

- ➤ Geochemical blade-refusal aircore programme along the Jatz strike corridor returns basement gold up to **12.1** g/t gold.
- Regional scale high tenor basement gold anomaly now extends over 1 km in strike at over 0.5 g/t gold.
- ➤ Anomaly broadens in width and grade to the north and is open to the north and west.
- ➤ Heritage clearance in place to extend drill coverage to the north and west to define northern extent of the target corridor.
- > Drilling to recommence as soon as practicable.

Montezuma Mining Company Ltd ("Montezuma" or "Company") is pleased to announce that a recently completed geochemical aircore drilling programme at the Company's 100% owned Yamarna Project has significantly extended the basement gold anomaly with basement gold grades **up to 12.1 g/t Au** returned in assay results.

The latest programme has now extended the high grade basement geochemical signature **over at least 1km in strike at over 0.5 g/t (500ppb) gold**. The anomaly is coherent and strikes in a north westerly direction and appears to be strengthening to the north. Mineralisation is open to the north and west.

The drilling to date at Jatz has tested only a small part of what is now interpreted as a target corridor approximately 5km in strike length and up to 2km in width, containing greenstone rocks with demonstrated potential for high grade Archean gold mineralisation.

Heritage clearances have now been received to extend the drilling programme to test this larger regional corridor. The next round of work

will be commenced as soon as practicable.

The latest results confirm the Jatz Prospect as a strongly mineralised corridor within a package of prospective Archean greenstones.

The Company intends to accelerate work with the aim of unlocking the obvious potential as quickly and cost effectively as possible.



# ABOUT MONTEZUMA MINING

Listed in 2006, Montezuma Mining
Company Ltd (ASX: MZM) is a diversified
explorer primarily focused on manganese,
copper and gold. The Company's primary
objective is to achieve returns for
shareholders through selected strategic
acquisitions and targeted exploration.

Montezuma Mining has 100% interests in the Yamarna Gold Project in the Yamarna Geenstone Belt, Western Australia and the Butcherbird Manganese/Copper Project in the Murchison region of Western Australia

## **MARKET DATA**

ASX code: MZM
Share price: \$0.20
Shares on issue: 70,464,350
Market capitalisation: \$14.1M
Cash (31 December 2015): \$5.7M

### **BOARD AND MANAGEMENT**

Chairman Seamus Cornelius Executive Director Justin Brown Non-Executive Director John Ribbons Exploration Manager Brad Drabsch



Company information, ASX announcements, investor presentations, corporate videos and other investor material on the Company's projects can be viewed at www.montezuma.com.au

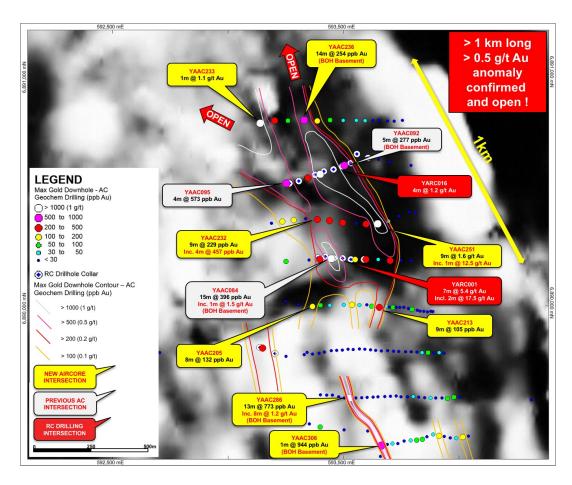


Figure 1: Collar locations over aeromagnetics. Assays from RC drilling are for the first 16 holes of a 37 hole programme.

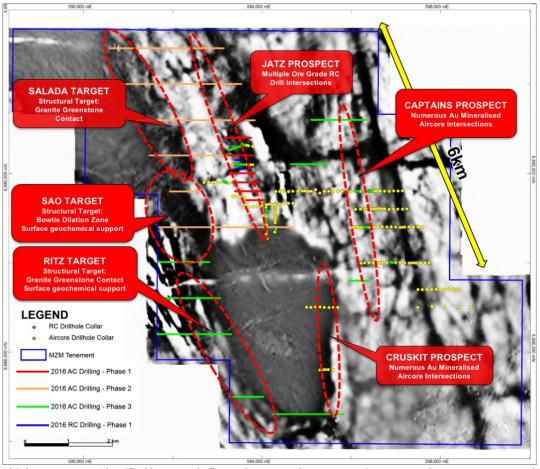


Figure 2: Multiple new targets identified by recently flown close spaced aeromagnetics. Targets shown over 1vD RTP data.

Hole ID	Easting (MGA 94 Z51)	Northing (MGA 94 Z51)	Nominal RL (m)	Dip (°)	Azimuth (mag ⁰)	Total Depth (m)	Depth From (m)	Depth To (m)	Intercept Width (m)	Au (ppb)
YAAC205	593365	6889997	398	-60	267	39	20	28	8	132
YAAC206	593400	6890002	398	-60	272	43	9	10	1	54
YAAC209	593537	6890004	399	-60	273	30	23	30	7	69
YAAC212	593622	6889999	400	-60	274	34	11	12	1	57
and							28	31	3	69
YAAC213	593655	6889994	400	-60	270	29	16	25	9	105
YAAC216	593714	6889994	400	-60	274	15	12	15	3	79
YAAC221	593797	6889985	400	-60	273	22	21	22	1	59
YAAC229	593234	6890365	394	-60	267	61	32	37	5	121
YAAC232	593386	6890373	396	-60	280	68	26	30	4	120
and							48	49	1	194
and							58	67	9	229
						Incl	58	62	4	457
YAAC233	593139	6890790	393	-60	259	71	48	53	5	209
and							65	66	1	1087 (1.08 g/t)
YAAC234	593201	6890801	393	-60	268	67	32	37	5	330
YAAC235	593259	6890801	393	-60	268	84	76	80	4	95
YAAC236	593329	6890803	394	-60	273	62	48	62	14	254
YAAC237	593386	6890799	394	-60	267	60	19	24	5	96
YAAC247	593439	6890368	396	-60	275	66	48	56	8	176
YAAC248	593496	6890360	396	-60	270	60	34	41	7	186
and							44	47	3	66
and							51	52	1	115
YAAC250	593597	6890353	398	-60	270	51	50	51	1	419
YAAC251	593647	6890355	398	-60	265	54	30	39	9	1648 (1.65 g/t)
						Incl	30	31	1	12531* (12.53 g/t)
and							53	54	1	51
YAAC277	593866	6889797	401	-60	270	12	10	11	1	54
YAAC286	593527	6889601	402	-60	270	29	16	29	13	773
						Incl	20	28	8	1201 (1.20 g/t)
YAAC304	593978	6889605	402	-60	270	10	8	10	2	71
YAAC306	593664	6889396	404	-60	270	27	26	27	1	944
YAAC312	593816	6889419	406	-60	270	13	12	13	1	58
YAAC313	593841	6889423	407	-60	270	12	10	12	2	78
YAAC316	593914	6889438	407	-60	270	10	9	10	1	129
YAAC320	594016	6889433	408	-60	270	15	13	15	2	125

Table 1: Significant gold assays >50ppb from recently completed aircore drilling at the Yamarna Project. All intersections are quoted as downhole widths. (Note - \* indicates this is a Fire Assay Repeat following an over range result initially.

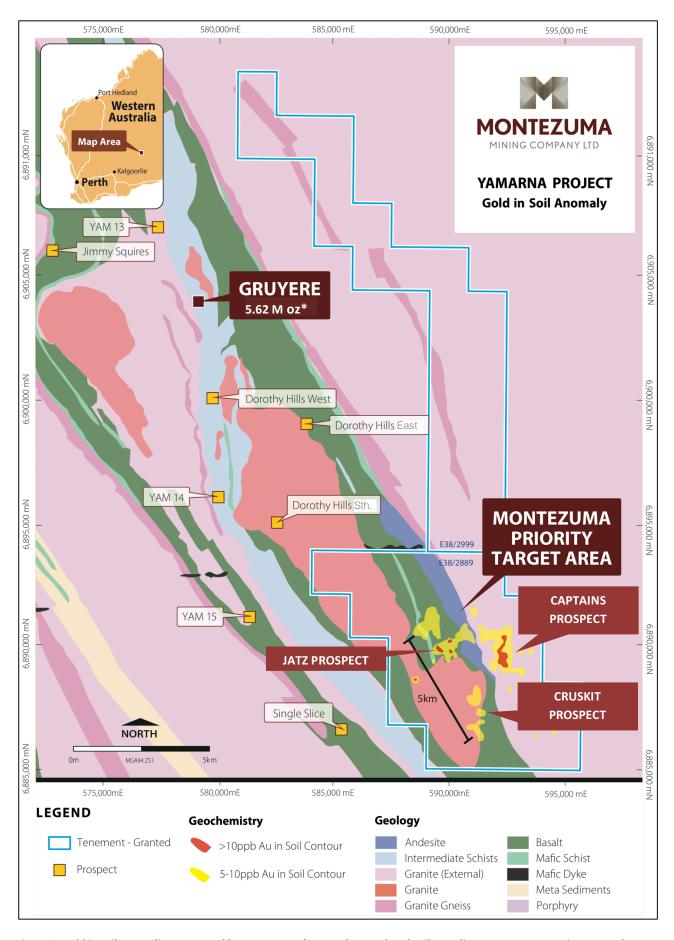


Figure 3: Gold in soil anomalies generated by Montezuma's recently completed soil sampling programme over interpreted basement geology. \* http://www.goldroad.com.au/reports/431bxcg4t7pqdd.pdf

# FOR MORE INFORMATION...

#### **Justin Brown**

**Executive Director** 

Phone: +61 8 6315 1400

Email: jbrown@montezuma.com.au

Company information, ASX announcements, investor presentations, corporate videos and other investor material on the Company's projects can be viewed at http://www.montezuma.com.au.

The information in this report that relates to Exploration Results, Mineral Resources and Mineral Reserves is based on information compiled by Mr Bradley Drabsch who is a member of the Australasian Institute of Geoscientists. At the time that the Exploration Results, Mineral Resources and Mineral Reserves were compiled, Mr Drabsch was an employee of Montezuma Mining Company Ltd. Mr Drabsch is a geologist and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Drabsch consents to the inclusion of this information in the form and context in which it appears in this report.

Please note with regard to exploration targets, the potential quantity and grade is conceptual in nature, that there has been insufficient exploration to define a Mineral Resource and that it is uncertain if further exploration will result in the determination of a Mineral Resource.

**JORC Table 1** (Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul> <li>drillhole collar using a hand held scoop.</li> <li>Samples were scooped in such a manner as to ensure portions of the whole pile were sampled. This is standard industry practice for this type of early phase drilling.</li> <li>Mineralisation determined qualitatively by geological logging and quantitatively through assaying.</li> <li>Approximately 2kg of sample was collected as a composite. This sample was pulverised to 85% passing 75µm then a 10g sub-sample digested via aqua-regia followed with assay by ICP-OES or ICP-MS methods.</li> </ul>
Drilling techniques	<ul> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul> <li>AC drilling using a face sampling blade or where AC hammer method used, a face sampling bit. Hole diameter nominally 100mm.</li> </ul>
Drill sample recovery	<ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul> <li>Recoveries qualitatively noted at the time of drilling and recorded in the MZM database.</li> <li>The cyclone of the drill rig is cleaned at the end of each 3m rod to ensure sample is not "hung-up" and samples are as clean as possible with as little cross contamination as possible.</li> <li>No relationship between grade and recovery has yet been established.</li> </ul>
Logging	<ul> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul> <li>All samples were logged to a level of detail to support future use in a mineral resource calculation should it be required.</li> <li>Qualitative: Lithology, alteration, mineralisation.</li> <li>Quantitative: Vein percentage, assaying for gold and other elements.</li> <li>All holes for their entire length are logged.</li> </ul>

Criteria	JORC Code explanation	Commentary
Sub- sampling techniques and sample preparation	<ul> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul> <li>Aircore (AC) drill chips were collected as composite samples (either 1m, 2m, 3m or 4m samples) from bulk piles laid out next to the drillhole collar using a hand held scoop.</li> <li>Samples were taken at interpreted geological boundaries in order to identify and discriminate between transported and in-situ mineralisation.</li> <li>Sample condition with respect to moisture content is noted on the geological log.</li> <li>The entire composite sample (approx. 2kg) has been dried, pulverised to 85% passing 75µm, a 10g sub-sample split then digested by aqua-regia followed by assay with ICP-MS or ICP-OES for gold and a suite of pathfinder elements.</li> <li>No field duplicates have been processed as yet. Pulp duplicates have been taken at the pulverising stage and selective repeats conducted at the laboratories discretion.</li> <li>Sample sizes are considered appropriate for the grainsize of the material sampled.</li> </ul>
Quality of assay data and laboratory tests	<ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul> <li>Samples were assayed using an ICP-MS or ICP-OES finish after being digested with aqua-regia (industry standard technique for low level Au in surface samples). This is considered a partial digest technique however in weathered samples it is considered to approximate a total digest assay.</li> <li>Assays were returned for the following elements: Au, Ag, As, Cu, Pb, Zn, Ni, Sb, Bi, W, Te and Mo.</li> <li>Certified Reference Material (Standards) was submitted with batches (approximately 1 in every 25 samples) and laboratory inserted standards, blanks and duplicates were also reported. Where gold levels were over range for the ICP-MS technique, a separate sample from the pulverised pulp was analysed using a 25g fire assay. The results reported for are all within tolerable limits.</li> </ul>
Verification of sampling and assaying	<ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul> <li>All data have been checked internally for correctness by senior MZM geological and corporate staff.</li> <li>All data is collected via Geobank Mobile software and uploaded into the MZM Geobank Database following validation.</li> <li>No adjustments have been made to assay data.</li> </ul>

Criteria	JORC Code explanation	Commentary
Location of data points	<ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	All location points were collected using handheld GPS in MGA 94 – Zone 51
Data spacing and distribution	<ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul> <li>Holes were drilled at various spacing based upon geological observations at the time of drilling. This is typically 100m, 50m or 25m. Drill lines are spaced at approximately 200m - 400m where multiple lines are drilled in an area.</li> <li>Hole spacing is appropriate for drilling at this early stage in the exploration process.</li> <li>Sample compositing has been applied. Samples were taken at interpreted geological boundaries in order to identify and discriminate between transported and in-situ mineralisation.</li> </ul>
Orientation of data in relation to geological structure	<ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul> <li>The orientation of structures is not known with certainty but drilling was conducted using appropriate orientations for interpreted structures.</li> <li>Bias introduced by drill orientation with respect to structures is not known.</li> </ul>
Sample security	The measures taken to ensure sample security.	<ul> <li>Chain of custody was managed by company representatives and is considered appropriate. All samples are bagged in a tied numbered calico bag, grouped into larger polyweave bags and cable tied. Polyweave bags are placed into larger bulky bags with a sample submission sheet and tied shut. Consignment note and delivery address details are written on the side of the bag and delivered to Toll in Laverton. The bags are delivered directly to MinAnalytical in Canning Vale, WA who are NATA accredited for compliance with ISO/IEC17025:2005.</li> </ul>
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No external audits or reviews have been conducted apart from internal company review.

# **Section 2 Reporting of Exploration Results**

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul> <li>E38/2889 is 100% owned by Montezuma Mining Company Limited and is in good standing and there are no known impediments to maintaining a licence to operate in the area.</li> <li>The land on which E38/2889 is situated within Aboriginal Reserve 20396. Montezuma Mining Company Limited has obtained "Mining Entry Permits" to operate within the licence area.</li> </ul>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul> <li>Very little exploration has been undertaken in the area of E38/2889 previously. The most detailed work was carried out by WMC during the mid-1990's where they collected -75um soil samples on a regional scale. WMC did not follow-up the low tenor anomalies they defined in the current work area at the time.</li> </ul>
Geology	Deposit type, geological setting and style of mineralisation.	Not enough information has been gathered to adequately define the precise geology in the area as it is largely covered in recent sand.
Drill hole Information	<ul> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:         <ul> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> </ul>	See appendix to the release.
Data aggregation methods	<ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values</li> </ul>	<ul> <li>No top-cuts have been applied when reporting results.</li> <li>First assay from the interval in question is reported (i.e. Au1), except in the cases where the assay repeats or is reported as over range for gold for the instrument being used. In this case, a fire assay repeat is conducted and that value reported. This is noted where this occurs.</li> <li>Aggregate sample assays calculated using a length weighted average</li> <li>Significant grade intervals based on intercepts &gt; 50ppb gold.</li> </ul>

Criteria	JORC Code explanation	Commentary
	should be clearly stated.	No metal equivalent values have been used for reporting of results.
Relationship between mineralisatio n widths and intercept lengths	<ul> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul> <li>Not enough information has been gathered to adequately define the precise geology in the area as it is largely covered in recent sand.</li> </ul>
Diagrams	<ul> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	Refer to figures in document.
Balanced reporting	<ul> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul> <li>All drill hole locations are reported and a table of significant intervals is provided in the release text.</li> </ul>
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All meaningful and material information is reported.
Further work	<ul> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul> <li>Second phase dill planning to follow-up significant intersections is underway and is expected to commence within Q4 2015.</li> </ul>

# **Section 2 Reporting of Exploration Results**

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul> <li>E38/2889 is 100% owned by Montezuma Mining Company Limited and is in good standing and there are no known impediments to maintaining a licence to operate in the area.</li> <li>The land on which E38/2889 is situated within Aboriginal Reserve 20396. Montezuma Mining Company Limited has obtained "Mining Entry Permits" to operate within the licence area.</li> </ul>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul> <li>Very little exploration has been undertaken in the area of E38/2889 previously. The most detailed work was carried out by WMC during the mid-1990's where they collected -75um soil samples on a regional scale. WMC did not follow-up the low tenor anomalies they defined in the current work area at the time.</li> </ul>
Geology	Deposit type, geological setting and style of mineralisation.	<ul> <li>Not enough information has been gathered to adequately define the precise geology in the area as it is largely covered in recent sand.</li> <li>Early observations indicate that the mineralisation present at Yamarna appears to be part of a typical Yilgarn Craton, Archaean, shear hosted, meso-thermal style system.</li> </ul>
Drill hole Information	<ul> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:         <ul> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> </ul>	See appendix to the release.
Data aggregation methods	<ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used</li> </ul>	<ul> <li>No top-cuts have been applied when reporting results.</li> <li>First assay from the interval in question is reported (i.e. Au1).</li> <li>Aggregate sample assays calculated using a length weighted average.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul> <li>for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul> <li>Significant grade intervals based on intercepts &gt; 0.1 g/t gold.</li> <li>No metal equivalent values have been used for reporting of results.</li> </ul>
Relationship between mineralisatio n widths and intercept lengths	<ul> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul> <li>Not enough information has been gathered to adequately define the precise geology in the area as it is largely covered in recent sand.</li> <li>True widths are not known, however, initial observations indicate the drilling is appropriate to the interpreted orientation of mineralising structures and downhole widths will approximate true widths.</li> </ul>
Diagrams	<ul> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	Refer to figures in document.
Balanced reporting	<ul> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul> <li>All drillhole locations are reported and a table of significant intervals is provided in the release text.</li> </ul>
Other substantive exploration data	<ul> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	All meaningful and material information is reported.
Further work	<ul> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	Drilling at the Yamarna Project is continuing at the present time.